

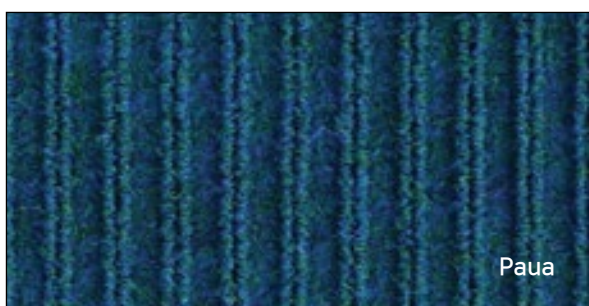
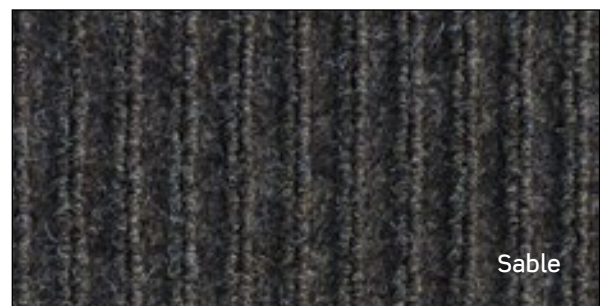
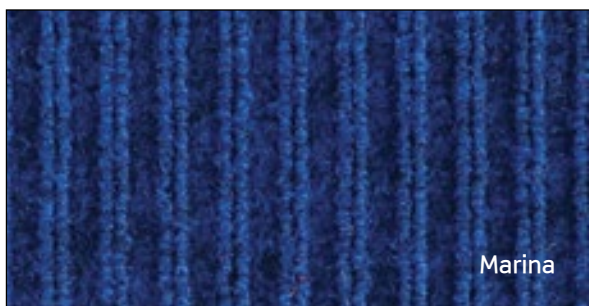


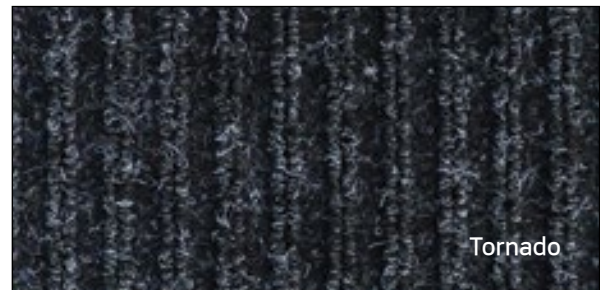

**AUTEX**   
Carpets

# Reef

COLOUR SELECTION

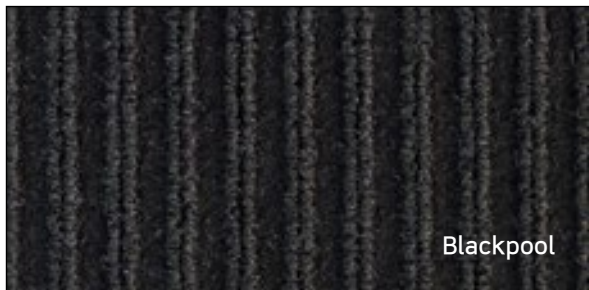

# Reef

## PRODUCT SPECIFICATIONS

Reef is a specialised marine carpet that holds up exceptionally under the harsh elements of salt, wind, rain and sun. These qualities also make Reef an ideal solution for a wide range of light commercial applications such as retail, where durability is a must. Reef has a classic broad-ribbed finish for a non slip effect.

### Care and Maintenance

Ask your local distributor for an Autex Carpet Care and Maintenance brochure, or download a copy from our website.

### Installation

We recommend all Autex Carpets to be installed in accordance with AS/NZS: 2455.1.2007 Textile floor coverings - installation practice. Ask your local distributor for an Autex Carpet Installation brochure, or download a copy from our website.

### Quality Standards

Autex is committed to Quality and Environmental best practice through our ISO 9001 and ISO 14001 certified Quality and Environmental Management Systems.

### General

Test result certificates are available upon request. For further information about our complete range of quality carpet, contact your local distributor or visit our website.

### Technical

**Country of Origin:** New Zealand

**Fibre:** Polypropylene Fibre

**Backing:** SBR Latex

**Total Product Weight:** 800gsm

**Total Nominal Thickness:** 8mm

**Product Width:** 2 metres

**Roll Length (standard):** 25 metres

### Performance

**UV Stabilised:** High Degree of UV Protection  
- Refer to Autex Warranty Card

**Moisture Absorption:** 0.006%. Will not rot or smell

### Fire Ratings:

AS 1530 Part 3

Spread of Flame (Index 0-10) 0

Smoke Developed (Index 0-10) 5

- Tested 10 June 1998, APL

AS/ISO 9239 Part 1

Average Critical Radiant Flux: 5.4kW/m<sup>2</sup>

Average Smoke Obscuration: 222% min

- Tested August 2003, CSIRO





**AUTEX**



**Autex Industries Ltd**  
702-718 Rosebank Rd  
Private Bag 19988  
Avondale 1746, Auckland  
New Zealand  
Phone +64 9 828 9179  
Fax +64 9 828 5810  
Freephone 0800 428 839  
[www.autex.co.nz](http://www.autex.co.nz)

**Autex Pty Ltd**  
166 Barnfield Rd  
PO Box 5099  
West Heidelberg, Melbourne  
VIC 3081, Australia  
Phone +61 3 9457 6700  
Fax +61 3 9457 1020  
Freephone 1800 678 160  
[www.autex.com.au](http://www.autex.com.au)

**Raider\***  
COLOUR SELECTION

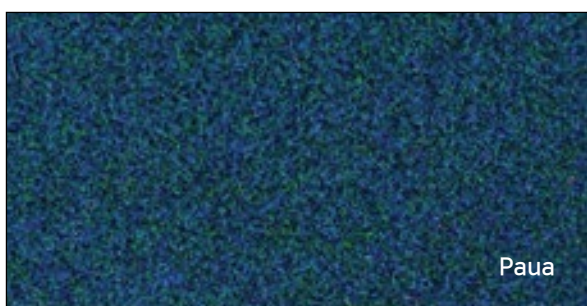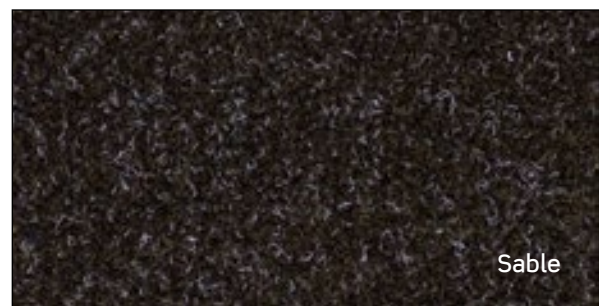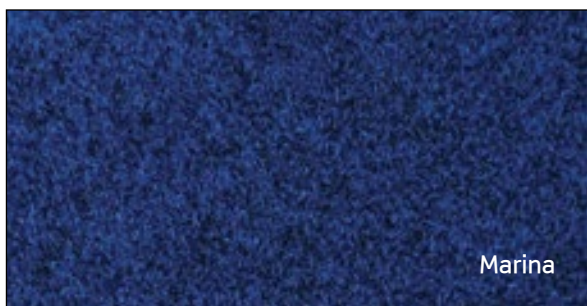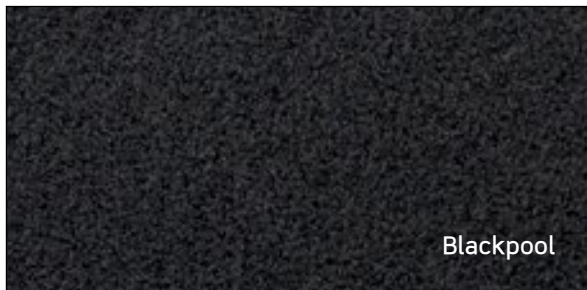

## Raider\*

### PRODUCT SPECIFICATIONS

Raider is a specialised marine carpet that holds up exceptionally under the harsh elements of salt, wind, rain and sun. These qualities also make Raider an ideal solution for a wide range of light commercial applications where durability is a must. Raider has a soft velour finish and is ideal for creating customised finishes.

#### Care and Maintenance

Ask your local distributor for an Autex Carpet Care and Maintenance brochure, or download a copy from our website.

#### Installation

We recommend all Autex Carpets to be installed in accordance with AS/NZS: 2455.1.2007 Textile floor coverings - installation practice. Ask your local distributor for an Autex Carpet Installation brochure, or download a copy from our website.

#### Quality Standards

Autex is committed to Quality and Environmental best practice through our ISO 9001 and ISO 14001 certified Quality and Environmental Management Systems.

#### General

Test result certificates are available upon request. For further information about our complete range of quality carpet, contact your local distributor or visit our website.

#### Technical

**Country of Origin:** New Zealand

**Fibre:** Polypropylene Fibre

**Backing:** SBR Latex

**Total Product Weight:** 800gsm

**Total Nominal Thickness:** 7mm

**Product Width:** 2 metres

**Roll Length (standard):** 25 metres

#### Performance

**UV Stabilised:** High Degree of UV Protection  
- Refer to Autex Warranty Card

**Moisture Absorption:** 0.006%. Will not rot or smell

#### Fire Ratings:

**AS 1530 Part 3**

Spread of Flame (Index 0-10) 4

Smoke Developed (Index 0-10) 3

- Tested 8 July 2002, CSIRO

**AS/ISO 9239 Part 1**

Average Critical Radiant Flux: 7.0kW/m<sup>2</sup>

Average Smoke Obscuration: 124% min

- Tested August 2003, CSIRO

**AUTEX**



**Autex Industries Ltd**  
702-718 Rosebank Rd  
Private Bag 19988  
Avondale 1746, Auckland  
New Zealand  
Phone +64 9 828 9179  
Fax +64 9 828 5810  
Freephone 0800 428 839  
[www.autex.co.nz](http://www.autex.co.nz)

**Autex Pty Ltd**  
166 Barnfield Rd  
PO Box 5099  
West Heidelberg, Melbourne  
VIC 3081, Australia  
Phone +61 3 9457 6700  
Fax +61 3 9457 1020  
Freephone 1800 678 160  
[www.autex.com.au](http://www.autex.com.au)